


**AMP Connect® Basic PDU Series, 20 C13
Socket, 6 C19 Socket, 1 Phase, 250V AC, 32A,
2x16A Magnetic Hydraulic Circuit Breaker,
3x4mm² 3.05m Cord, IEC309 Plug**

MODEL NUMBER : **KBPV221110344**

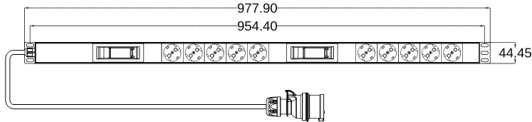

AMP Connect® Basic PDU Series, 20 C13 Socket, 6 C19 Socket, 1 Phase,
250V AC, 32A, 2x16A Magnetic Hydraulic Circuit Breaker, 3x4mm² 3.05m
Cord, IEC309 Plug

Specifications :

AUSGABE-Merkmale	
Output Load Capacity	32A - 250V AC/8.000VA
Allgemeine Spezifikation	
Color	Grey
Cable Design	
REACH Regulation	REACH Declaration
Product Certifications	RoSH
REACH Free of SVCH	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury Free	Yes.
China RoHS Regulation	China RoHS Declaration
Mechanical Specifications	
Mounting Position	Vertical
Mounting Location	Side
Depth	44,45 mm
Height	977,90 mm (22U)
Widht	44,45 mm
Environmental Specifications	
Relative Humidity	%5 - %95

Regulatory Compliance/Certifications	
RoHS Exemption Information	Yes..
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
Standards	CE
Uncategorized	
Main Input Voltage	250V AC 1 Phase
Product or Component Type	PDU
PDU Type	Basic PDU
Main Output Voltage	220V AC - 250V AC
Input Connection Type	IEC60309 32A P + N + ($\perp$)
Number of Rack Unit	0U
Cable Lenght	2 MT 3x4 mm ² H05VV-F
Breaker Type	2x16A Miniature Circuit Breaker
Mounting Preference	No Preference
Mounting Mode	Rack Mounted
Line Rated Current	32A
Permissible Voltage	220V AC - 250V AC
Input Current Limits	32A
Input Frequency	50/60 Hz
Type and Number of the Sockets	Schuko Socket 10
Socket Security 1 - 2	Unlocked Unlocked
Ambient Air Temperature for Operations	23 F° - 140 F° (-5C° - 60C°)
Operating Altitude	0ft. - 100000ft.
Ambient Air Temperature for Storage	-13 F° - 149 F° (-25C° - 65C°)
Storage Relative Humidity	%5 - %95
Storage Altitude	0ft. - 100000ft.
Unit Type of Package	PCE
Number of Units in Package	1
Warranty	2 Years Warranty

