


# AMP CONNECT® HD5 Fiber Patch Panel 1U

## empty accept upto 12 adapter plate or 12 MTP Cassette

MODEL NUMBER : **FPPHD5-12P2U**

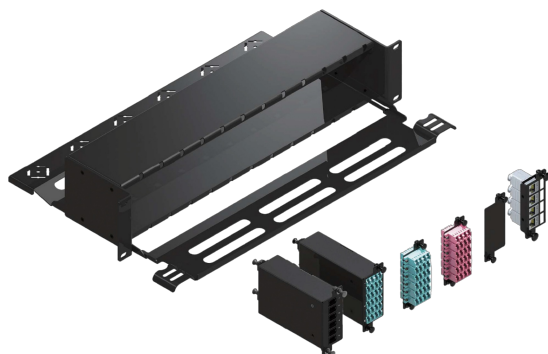

### Specifications :

| Classement du produit                  |                                             |
|----------------------------------------|---------------------------------------------|
| Regional Availability                  | Asia   Europe   Middle East   Africa        |
| Portfolio                              | LEXF®                                       |
| Product Type                           | Fiber patch panel                           |
| Product Series                         | HD5                                         |
| Spécifications générales               |                                             |
| Mounting Type                          | Rack 19-in   Rack 23-in   Cabinet-mount     |
| Color                                  | Black                                       |
| Panel Specifications                   |                                             |
| Total Fibers Capacity                  | 288 F                                       |
| Number of Panels   Cassettes Available | 12..                                        |
| Front Interface                        | Unloaded                                    |
| Cable entry type                       | External and Internal strain-relief bracket |
| Fiber Shelf Movement                   | Fixed                                       |
| Material Specifications                |                                             |
| Housing Material                       | Powder-coated metal and polycarbonate tray  |
| Mechanical Specifications              |                                             |
| Rack Unit Hight                        | 2U                                          |
| Environmental Specifications           |                                             |

|                                             |                                                                                                                                |
|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Temperature range, operation                | -40 °C to 70 °C (-40 °F to 158 °F )                                                                                            |
| <b>Regulatory Compliance/Certifications</b> |                                                                                                                                |
| ROHS                                        | Compliant.                                                                                                                     |
| CHINA-ROHS                                  | Below maximum concentration value                                                                                              |
| Safety Standard                             | CSA 22.2   UL 1863                                                                                                             |
| Temperature range, Approvals and Listings   | Meets ANSI/TIA/EIA-568A and 606   Tested in accordance with Telecordia GR-63-CORE   UL1863 - Communication Circuit Accessories |
| UK-ROHS                                     | Compliant                                                                                                                      |