


## AMP CONNECT® THUNDER X10® LAN cable, U/FTP, 4P, Cat6A, 23AWG, LSZH Rated, 500m,White

MODEL NUMBER : **CCLTHX10-UFLWHR**

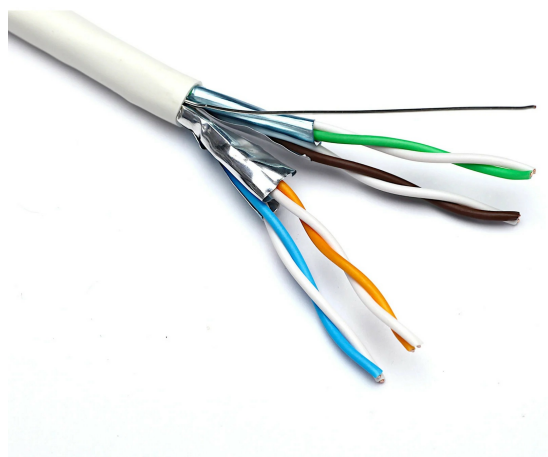

### Specifications :

| 产品分类                    |                                           |
|-------------------------|-------------------------------------------|
| Regional Availability   | Asia   Europe   Middle East   Africa      |
| Portfolio               | THUNDER X10®                              |
| Product Type            | Twisted pair cable                        |
| 一般规格                    |                                           |
| ANSI/TIA Category       | Cat 6A                                    |
| Cable Component Type    | Horizontal.                               |
| Cable Type              | U/FTP (shielded)                          |
| Jacket Color            | White.                                    |
| Conductor Type          | Solid                                     |
| Conductors quantity     | 8 Conductors                              |
| Separator Type          | Cross Isolator                            |
| Transmission Standards  | ANSI/TIA-568.2-D   ISO/IEC 11801 Class EA |
| Pairs Quantity          | 4 Pairs                                   |
| Material Specifications |                                           |
| Conductor Material      | Bare copper                               |

|                                       |                                                                                                                                                                                            |
|---------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Insulation Material                   | Polyolefin..                                                                                                                                                                               |
| Jacket Material                       | Low Smoke Zero Halogen - LSZH                                                                                                                                                              |
| Separator Material                    | Polyolefin                                                                                                                                                                                 |
| Separator 2 Material                  | Polyester/Aluminum shield                                                                                                                                                                  |
| <b>Mechanical Specifications</b>      |                                                                                                                                                                                            |
| Pulling Tension, maximum              | 11.34 kg   25 lb                                                                                                                                                                           |
| <b>Electrical Specifications</b>      |                                                                                                                                                                                            |
| dc Resistance, maximum                | 7.61 ohms/100 m   2.32 ohms/100 ft                                                                                                                                                         |
| dc Resistance Unbalance, maximum      | 0.01                                                                                                                                                                                       |
| Mutual Capacitance at Frequency       | 4.2 nF/100 m @ 1 kHz                                                                                                                                                                       |
| Nominal Velocity of Propagation (NVP) | 0.78                                                                                                                                                                                       |
| Operating Frequency, maximum          | 600 MHz                                                                                                                                                                                    |
| Operating Voltage, maximum            | 72V                                                                                                                                                                                        |
| Remote Powering                       | Fully supports the safe delivery of power over LAN cabling described by IEEE 802.3bt Type 4 - complies with the unmating under electrical load requirements prescribed by IEC 60512-99-003 |
| Segregation Class                     | no                                                                                                                                                                                         |
| <b>Environmental Specifications</b>   |                                                                                                                                                                                            |
| Operating Temperature                 | -20 °C to +60 °C (-4 °F to +140 °F)                                                                                                                                                        |
| Acid Gas Test Method                  | IEC 60754-2   VDE 0482-267-2-3   EN 60754-2                                                                                                                                                |
| Environmental Space                   | Low Smoke Zero Halogen (LSZH)                                                                                                                                                              |
| Flame Test Method                     | IEC 60332-1-2   VDE 0482-332-1-2   EN 60332-1-1                                                                                                                                            |
| Smoke Test Method                     | IEC 61034-2   VDE 0482-1034-2   EN 61034-2                                                                                                                                                 |
| <b>Dimensions</b>                     |                                                                                                                                                                                            |
| Diameter Over Insulated Conductor     | 1.168 mm   0.046 in                                                                                                                                                                        |
| Diameter Over Jacket, nominal         | 7.01 mm   0.276 in                                                                                                                                                                         |
| Jacket Thickness                      | 0.61 mm   0.024 in                                                                                                                                                                         |
| Conductor Gauge, singles              | 23 AWG                                                                                                                                                                                     |
| <b>Packing</b>                        |                                                                                                                                                                                            |
| Cable weight                          | 48.410 kg/km   32.53 lb/kft                                                                                                                                                                |

|                    |           |
|--------------------|-----------|
| Packaging quantity | Reel 500M |
|--------------------|-----------|